



Outdoor Preamplifier with Calibration Check

For community, traffic or aircraft noise monitoring

Highlights

- Use with Model 831 sound level meter
- Free-field, random or 90° response using the same microphone and the Model 831
- Remote calibration check simultaneously at five different frequencies
- Rugged stainless steel construction
- Internal temperature and humidity sensor
- Built-in heater with intelligent control to minimize power usage and prevent condensation.
- Broad temperature range (-40 °C to 70 °C)
- No desiccants needed
- Use with EPS2106-3 or EPS2108-3

Applications

- Unattended Outdoor Installations
- Environmental Noise Studies
- City Noise Monitoring
- Industrial Noise Monitoring
- Airport & Traffic Noise
- Compliant Investigation
- IEC 61672 Class 1 Compliant Measurements



The Larson Davis PRM2103 has been designed to be used with an environmental shroud for portable or permanent outdoor use in a wide range of weather conditions. The PRM2103 combines the cost savings of a standard preamplifier with features for unattended monitoring and an inexpensive shroud to create a product that is ideal for remote sound level measurement.


New in the PRM2103 is an automatic calibration check that checks five different frequencies all at the same time which enables better detection of any failure. **When used with the Model 831 sound level meter, the acoustic response can be selected as free-field, random or 90 degree using a simple setting on the sound level meter.** Because of this flexibility, only one preamplifier is necessary and there is no need to use different microphones for different fields.

Because field visits to a remote monitor can be expensive and time consuming, the PRM2103 has been designed to require no routine maintenance. It includes a built-in humidity and temperature sensor and can automatically turn on an internal heater when there is a risk of condensation. All this has been accomplished while keeping power usage low (< 2 mA with heater off) so that the PRM2103 is an excellent solution for battery powered applications.

Model EPS2108 Environmental Shroud
Model 831 Sound Level Meter



Model PRM2103
Pre-amplifier with Calibration Check

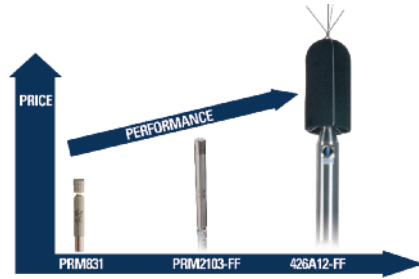

Electrical Specifications

Microphone Bias	0 Volts
Input Impedance	10 GΩ // 0.1 pF typical
Max Input Level	± 18 V peak
Max Output Level (typ)	± 14 V peak (143 dB peak using 50 mV/Pa mic)
Max Output Current	10 mA
Output Impedance	50 Ω
Total Harmonic Distortion +N	< -60 dBc at 8 V rms and 1kHz
Dynamic Range	124 dB (16 dB to 140 dB typical A-weighted)
Power Supply	10 V to 15.5 V (12 V nominal)
Power (12V)	< 2 mA typ, 50 mA max with heater
Calibration Check Level	94 dB ±2 dB (each tone)
Calibration Frequencies	31.25, 250, 1000, 4000 & 8000 Hz
Calibration Check Sensitivity	± 0.005 dB/°C typical
Max Cable Length	100 ft (30 m)

Internal Sensor Accuracy

Relative Humidity	± 5% RH
Temperature	± 2 °C

Phase Linearity

10 Hz to 32 Hz	- 3° to 10 °
32 Hz to 100 kHz	< ± 3°
Output in phase with input	

Frequency Range

10 Hz to 20 kHz	± 0.3 dB
-----------------	----------

With respect to level at 250 Hz

Self Generated Noise (Typical)

	Z-weighted	A-weighted	C-weighted
Electronic	27 dB (22 μV)	8 dB (2.5 μV)	14 dB (5.0 μV)
With Microphone	28 dB	16 dB	18dB

Environmental Specifications

Operating Temperature	- 40 °F to 158 °F (- 40 °C to 70 °C)
Operating Humidity	0 to 100% RH Non-condensing
Temperature Sensitivity	± 0.005 dB/°C

Temperature Sensitivity with 377B02 microphone at 1 kHz

-40 °C to -10 °C	< ± 1.0 dB
-10 °C to 50 °C	< ± 0.5 dB
50 °C to 70 °C	< ± 0.9 dB

Humidity Sensitivity with 377B02 microphone at 1 kHz and 40 °C

0 to 100% RH	< ± 0.2 dB
--------------	------------

Acoustical Frequency Response Limits

Frequency (Hz)	0 degree Free-field	90 degree Free-field	Random
10.0	3.0	-4.0	3.0
12.5	2.5	-3.5	2.5
16.0	2.0	-3.0	2.0
20.0	2.0	-2.0	2.0
25.0	2.0	-1.5	2.0
31.5	1.5	-1.5	1.5
40 to 4000	1.0	-1.0	1.0
5000	1.5	-1.5	1.5
6300	1.5	-2.0	1.5
8000	1.5	-2.5	1.5
10000	2.0	-3.0	2.0
12500	2.0	-5.0	2.0
16000	2.5	-16.0	2.5
20000	3.0	-∞	3.0

with respect to level at 250 Hz (dB)

Physical

Microphone Thread	11.7 mm – 60 UNS (.4606 – UNS)
Diameter	0.5 in (12.7 mm)
Height	5.25 (133 mm)
Venting	Bottom of preamplifier by connector
Output Connector	10-pin male Lemo 1B

Compliance

IEC 61672-1 (2002) Class 1 and ANSI S1.40-1984 with Model 831
IEC 61326-1 (2005) EMC requirements for electrical equipment
IEC 61010-1 (2001) Safety

Included Accessory

377B02	1/2 inch Prepolarized Microphone
--------	----------------------------------

Accessories

EPS2106-3	Environmental protection with 3/4- NPSM mount
EPS2108-3	Environmental protection with ¼-20 mount
CBL203-20	PRM2103 to Model 831 cable, 20 ft (6 m)
CBL208-20	PRM2103 to 831-INT-ET cable, 20 ft, (6 m)
CAL200	Acoustic Calibrator
PSA027	12V power supply
Model 831	Class 1 Sound Level Meter

Ordering Information

PRM2103-FF	PRM2103 Outdoor Preamplifier with 377B02 microphone and calibration check
CER-PRM2103	Factory calibration and certification for PRM2103
CER-PRM2103-E	Environmental testing

LARSON DAVIS
 A PCB PIEZOTRONICS DIV.
 3425 Walden Avenue, Depew, NY 14043-2495 USA
 Phone 716-926-8243
 Toll-Free in USA 888-258-3222
 Fax 716-926-8215 E-mail sales@larsondavis.com
 Web Site www.larsondavis.com

ISO 9001 CERTIFIED

© 2013 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, and ICP are registered trademarks of PCB Group Inc., SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics, Inc. HV Manager is a trademark of PCB Piezotronics, Inc. All other trademarks are property of their respective owners.

LD-PRM2103-0913

Printed in U.S.A.

For environmental noise monitoring and building acoustics, **Larson Davis** offers a full line of instruments, accessories and software. For personal noise and vibration exposure monitoring, Larson Davis complements this with sound level meters, personal noise dosimeters, human vibration meters, audiometric calibration systems and hearing conservation programs.

Visit www.larsondavis.com to locate your nearest sales office